


RANGES

FEATURES & SPECIFICATIONS

	ELECTRIC RANGES		COMBINATION RANGES			ALL GAS RANGES		ELECTRIC WALL OVENS
	1850	1855	1865	1870	1875	1860	1867	1880
Range Widths	*Will fit minimum 30 1/4" cabinet opening.							
	*30 1/8"	44 1/4"	44 1/4"	*30 1/8"	44 1/4"	*30 1/8"	44 1/4"	29 7/8"
OVENS								
Self-Cleaning Electric Oven (4.3 cu. ft.)	•	•	•	•	•			
Oven Size: 25" W x 16" H x 18 3/4" D								
Electric Self-Cleaning Convection Oven (4.0 cu. ft.)	optional	optional	optional	optional	optional			•
Oven Size: 25" W x 16" H x 16 5/8" D	standard on STE Models							
Gas Self-Cleaning Oven with waist high Broiler (4.0 cu. ft.)						•	•	
Oven Size: 25" W x 16" H x 18" D								
"Stay Hot" Food Warmer		•			•		•	
Electronic Oven Control	•	•	•	•	•	•	•	•
Delayed Start Baking	•	•	•	•	•	•	•	•
Dual Element Baking	•	•	•	•	•	•	•	•
Vari. Temp. Broil	•	•	•	•	•	•	•	•
Door Activated Oven Light	•	•	•	•	•	•	•	•
Heavy Duty, Plated Oven Racks	•	•	•	•	•	•	•	•
Porcelain Enamel Broiler Pan	•	•	•	•	•	•	•	•
Sabbath Mode								•
RANGETOPS								
Electric High-speed Radiant Elements under glass (ST)	optional	optional						
High-Speed Radiant Elements under glass with Electronic Control (STE)	optional	optional						
Gas: Sealed Surface Burners with cast grates			4	•	•	•	•	
Converts to L.P. (Propane)			•	•	•	•	•	
Gas Top Burners, 8,000* BTU			2	2	3	2	3	
Gas Top Burners, 12,000* BTU			1	1	2	1	2	
Superburner, 15,000* BTU			1	1	1	1	1	
<i>*Ratings for liquid propane are approximately 10% lower</i>								
Ultra Temp™ Electric Cast Elements	optional	optional						
Electric High Speed Radiant Elements under glass			optional					
Porcelain Enamel Work Surface (replaces two burners/elements)			optional				optional	
Electronic Spark with Re-ignition			•	•	•	•	•	
Easy Clean Porcelain Top or Top Frame	•	•	•	•	•	•	•	
Nickel Trimmed Range Top	•	•	•	•	•	•	•	
UPPER CABINET								
350 CFM Exhaust Fan standard (recirculating and outside vent)	•	•	•	•	•	•	•	
485 CFM Wall Mounted Exhaust Fan (outside mount, outside vent)	optional	optional	optional	optional	optional	optional	optional	
636 CFM In-line Exhaust blower (outside vent only)	optional	optional	optional	optional	optional	optional	optional	
Cooking Surface Light, Night Light	•	•	•	•	•	•	•	
"Feather Touch" Tempered Glass Oven Control Panel	•	•	•	•	•	•	•	
POWER RATING								
Power Source (208 to 250V) appliance rating	240V-35A	240V-50A	240V-30A	240V-30A	240V-30A	120V-5A	120V-6A	240V-30A
Power Ratings NG (BTU's)			43,000	43,000	63,000	59,000	79,000	
Power Ratings LP (BTU's)			38,700	38,700	56,700	53,100	71,100	
Power ratings/oven burner NG (BTU's)						16,000	16,000	
Shipping Weight	375 lbs.	410 lbs.	420 lbs.	385 lbs.	425 lbs.	395 lbs.	435 lbs.	200 lbs.

RANGE DIMENSIONS

Four Burner Model: 30 1/8" W x 67 7/8" H x 29 1/2" D. Six Burner Model: 44 1/4" W x 67 7/8" H x 29 1/2" D. Our 30" models will fit into a 30 1/4" opening without cabinet alterations. Short leg models require a minimum opening of 30 3/4", and are 65 7/8" high.

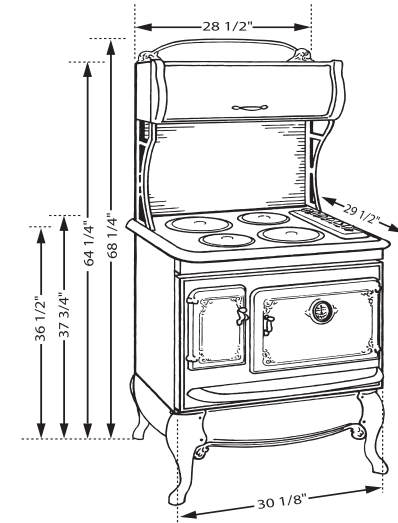

IMPORTANT

Fitting Range into Cabinet Opening: Four Burner Models: If you are designing cabinets to fit range, leave 33" between base cabinets. Countertop overhangs on each side should be 1-3/8". Ranges will fit openings as small as 30-1/4". Short leg models require 31" minimum clearance between countertops. Six Burner Models: Require 45-1/2" opening between base cabinets. Left countertop overhang should be 1-3/8". No overhang required on right side. Countertops should be standard 36" high.

NATURAL GAS OR PROPANE?

Ranges are built to accommodate natural gas unless propane (LP) has been specified on your order. Conversion parts are available and are easy to install. (See product manual for instructions.)